
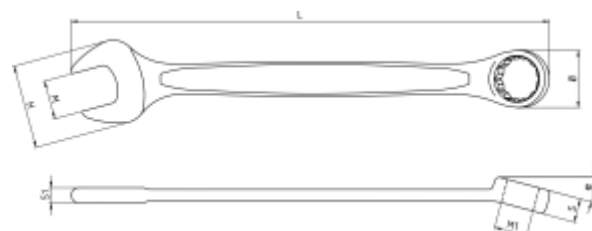


DIN 3113 UNI-ISO 7738

Stylish slim combination wrench, enhanced by a slender profile and lighter to the touch.

Features:

- Head thickness reduced to a minimum, to allow access to all spaces.
- Torque values more than doubled compared to the requirements to be satisfied under ISO 1711
- Improved ergonomics translating into increased force transmission



art.	M mm	M1 mm	L mm	H mm	Ø mm	S mm	g
000421005	42 5,5	5,5	95	15,4	10,4	5,3	13
000421006	42 6	6	95	15,4	10,4	5,3	13
000421007	42 7	7	105	17,3	11,1	5,8	16
000421008	42 8	8	116	19,2	12,6	6,4	21
000421009	42 9	9	127	21,2	14,1	6,9	27
000421010	42 10	10	137	23,1	15,4	7,3	34
000421011	42 11	11	148	25,1	16,8	7,7	43
000421012	42 12	12	158	27,3	18,2	8,1	52
000421013	42 13	13	169	29,1	19,6	8,8	64
000421014	42 14	14	180	31,2	21	9	76
000421015	42 15	15	190	33,1	22,4	9,4	88
000421016	42 16	16	201	35	23,8	10	104
000421017	42 17	17	212	36,8	25,2	10,5	125
000421018	42 18	19	222	39	26,7	11,1	139
000421019	42 19	18	233	41	28	11,8	159
000421020	42 20	20	243	43	29,4	12,3	185
000421021	42 21	21	254	45	30,7	12,7	204
000421022	42 22	22	264	47	32,2	13,2	226
000421023	42 23	23	275	49	33,5	13,7	251
000421024	42 24	24	285	50,9	34,9	14	277
000421025	42 25	25	296	52,9	36,2	14,2	307
000421026	42 26	26	307	55	37,6	14,6	339
000421027	42 27	27	317	56,9	39	15	371
000421028	42 28	28	328	58,9	40,3	15,4	405
000421029	42 29	29	338	60,9	41,9	15,7	445
000421030	42 30	30	349	62,8	43	16	481
000421032	42 32	32	370	66,8	45,7	16,6	560
000421034	42 34	34	391	70,9	48,5	17,2	650
000421035	42 35	35	412	74,8	51,3	18	761
000421036	42 36	36	412	74,8	51,3	18	746
000421038	42 38	38	433	78,8	54	18,7	857
000421041	42 41	41	465	84,8	58	19,5	1034